


Parameter	Specification
Dimensions	50 X 90mm
Impedance	$4\Omega \pm 15\%$
Input Power	7 W / 10 W
Lowest Resonant Frequency, $F_0$	$220\text{Hz} \pm 20\%$
Sensitivity @ 1W/0.5m	$88 \pm 3$ dB
Effective Frequency Range	$F_0$ to 20 kHz
Total Harmonic Distortion	<5 %

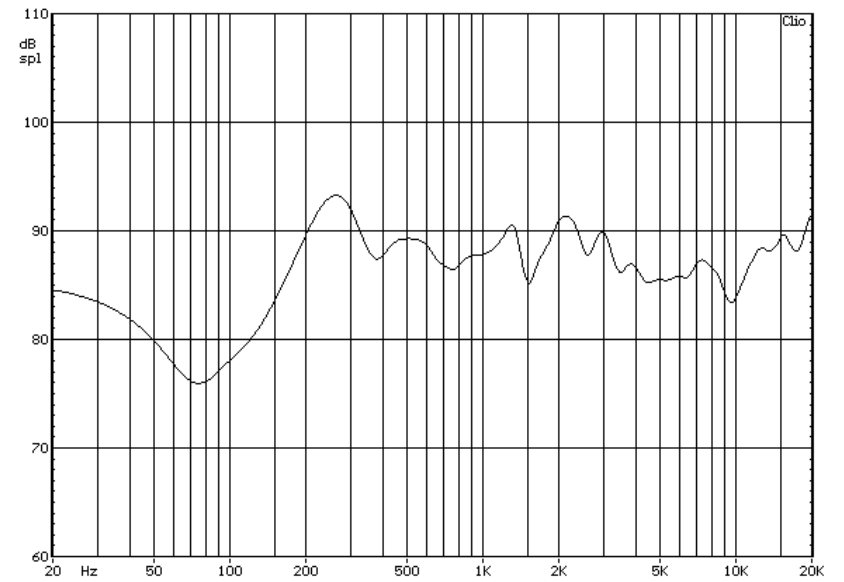

SPECIFICATIONS SUBJECT TO CHANGE

Part No. A5090004FC015AR REV. 0.0

50 X 90 mm Speaker

Email: [speakers@stetron.com](mailto:speakers@stetron.com)

Web Site: [www.stetron.com](http://www.stetron.com)

