



Parameter	Specification	Remarks
1. Dimension	φ40mm	Outside Dimension
2. Impedance	4Ω ±15%	@ 1kHz/1.0V <sub>RMS</sub>
3. Continuous/Peak Power Input	2 W / 4W	
4. Lowest Resonant Frequency, F <sub>0</sub>	160Hz±25%	Constant Voltage (1.0V <sub>RMS</sub> )
5. Sensitivity	77±3 dB	Test cond. at 1.0W/1.0m @ 1.0 KHz
6. Effective Frequency Range	F <sub>0</sub> to 10 kHz	
7. Operation Test	2.0W/ 4.0W	
8. Total Harmonic Distortion	Max. 8 % Max. 3 %	@ 160-500 Hz ( 0.25W/1m) @ 500-10,000 Hz ( 1W/1m)
9. Polarity	When a positive DC current is applied to the Terminal marked +, the diaphragm shall move forward	
10. ESD	Min.15 kV	No arcing should occur ESD test done according to IEC 801-2(1991-04)
11. Magnet	φ15.5 x 4 mm	Nd-Fe-B (φD x h)
<b>TESTS</b>		
1. Extraneous Noise	2.83 V <sub>RMS</sub> from F <sub>0</sub> to 10 kHz	No Buzzes or Rattles shall occur
2. Max. Input Power	1kHz Sine wave of 4.0W applied for 1 min.	All parameters must remain within specified limits
3. Drop Test	Speaker mounted in box dropped 18x from a height of 1m to a 5mm thick board	
4. Load Test	White Noise (2.0W) applied for 96h	Must meet items 5 to 7 after test
5. High Temperature Test	+70±2°C, 50%RH for 96h with 1h rest at room temperature	
6. Low temperature test	-25±3°C, 50%RH for 96h with 1h rest at room temperature	
7. Humidity Test	+40±2°C, 90%RH for 96h with 1h rest at room temperature	

Typical Frequency Response

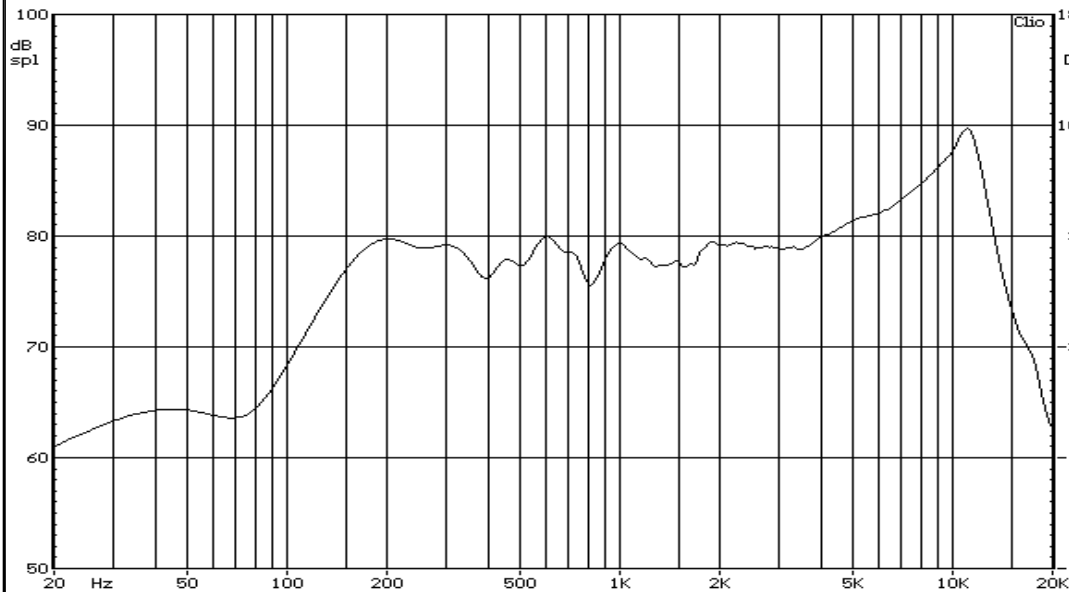

 <b>Stetron International Inc.</b>		Loudspeaker Specifications Φ40 mm, 4 Ω Nd-Fe-B Magnet Rated power 2.0W Metal frame, RoHS compliant			
		SIZE	DRAWN BY	PART No.	
<b>A</b>				<b>D0040004NR021AR</b>	
SCALE	<b>N/A</b>	DATE	<b>6-Oct-08</b>	SHEET	<b>1 of 1</b>
REV	<b>3.0</b>	DWG No. / FILE		<b>DB07-030</b>	