



| Parameter | Specification | Remarks |
|--|--|--|
| 1. Dimensions | φ40mm | Outside Dimension |
| 2. Impedance | 4Ω ±20% | @1kHz/1.0V _{RMS} |
| 3. Continuous/Peak Power Input | 2 W / 3W | |
| 4. Lowest Resonant Frequency, F ₀ | 250±50Hz | Constant Voltage (1.0V _{RMS}) |
| 5. Sensitivity @ 0.5m | 86±3 dB | Test cond. at 1.0W/0.5m @ avg. 0.6/0.8/1.0/1.5 kHz |
| 6. Effective Frequency Range | F ₀ to 15kHz | |
| 7. Operation Test | 2.0W | |
| 8. Total Harmonic Distortion | <5 % | 1kHz (1W/0.5m) |
| 9. Polarity | When a positive DC current is applied to the Terminal marked +, the diaphragm shall move forward | |
| 10. Magnet | φ12.5 x 3mm | Nd-Fe-B (φD x h) |
| 11. Weight | 25±5 g | |
| TESTS | | |
| 1. Extraneous Noise | 2.83V _{RMS} from F ₀ to 20kHz | No Buzzes or Rattles shall occur |
| 2. Max. Input Power | 1kHz Sine wave of 3.0W applied for 1 min. | All parameters must remain within specified limits |
| 3. Drop Test | Speaker mounted in box dropped 18x from a height of 1m to a 5mm thick board | |
| 4. Load Test | White Noise (2.0W) applied for 96h | Must meet items 5 & 10 after test |
| 5. High Temperature Test | +80±3°C, 50%RH for 96h with 1h rest at room temperature | |
| 6. Low temperature test | -40±3°C | |
| 7. Temperature cycling test | -40 to +80±3°C in 300 s | |
| 8. Humidity Test | +40±3°C, 90%RH for 96h with 1h rest at room temperature | ESD test done according to IEC 801-2 (1991-04) |
| 9. ESD Test | No arcing should occur at ≤16kV | |

Typical Frequency Response

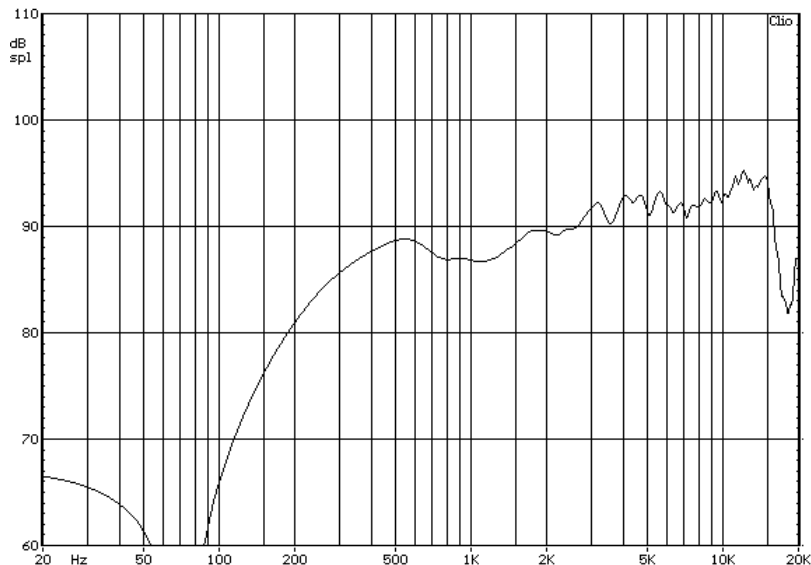

| | | | |
|---|------------|--|---------------|
|  Stetron International Inc. | | Loudspeaker φ40mm, 4Ω, Paper cone, Rubber surround Nd-Fe-B magnet, Rated power: 2 W w/gasket, RoHS | |
| SIZE | DRAWN BY | PART No. | |
| A | | D0040004NU010AR | |
| SCALE | N/A | DATE | SHEET |
| | | 14-SEP-06 | 1 of 1 |
| REV | 2.3 | DWG No. / FILE | |
| | | DB05-119 | |