


Parameter	Specification
Dimensions	40x 18.5mm
Impedance	$8\Omega \pm 15\%$
Input Power	1W/2W
Lowest Resonant Frequency, F_0	$280\text{Hz} \pm 20\%$
Sensitivity @ 1W/0.5m	$84 \pm 3 \text{ dB}$
Effective Frequency Range	F_0 to 20.0 kHz
Total Harmonic Distortion	< 5%

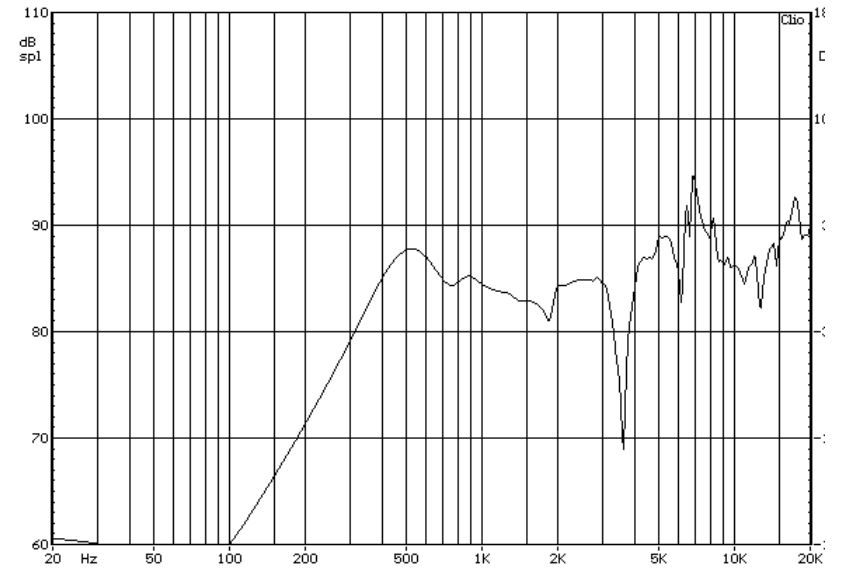

Specifications subject to change

Part No. D0040008NU10BAR Rev0.2

40 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

