


Parameter	Specification
Dimensions	50x 12.5mm
Impedance	$8\Omega \pm 15\%$
Input Power	0.5W/1W
Lowest Resonant Frequency, $F_0$	650Hz $\pm 20\%$
Sensitivity @ 1W/0.5m	90 $\pm 3$ dB
Effective Frequency Range	$F_0$ to 4.0 KHz
Total Harmonic Distortion	< 5%

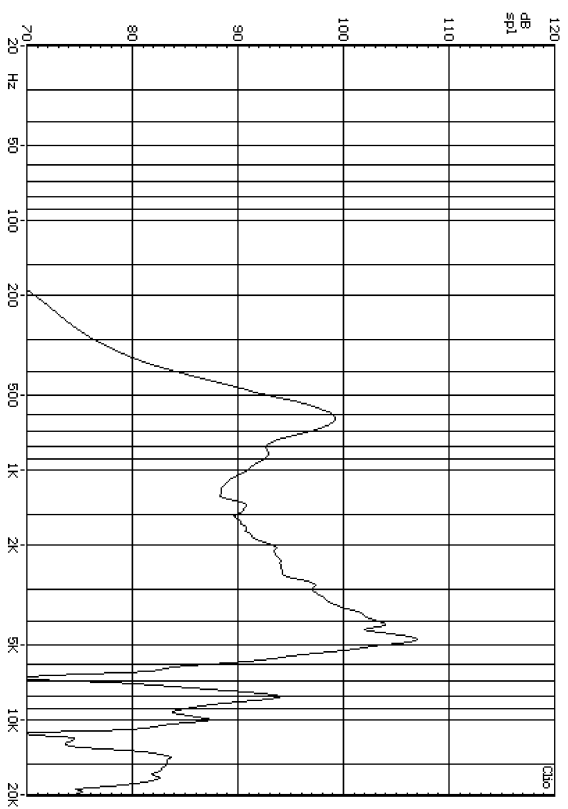

Part No. D0050008NM14BA

50 mm Speaker

Email: [speakers@stetron.com](mailto:speakers@stetron.com)

Web Site: [www.stetron.com](http://www.stetron.com)

