


Parameter	Specification
Dimensions	50x 12.5mm
Impedance	8Ω ± 1.5%
Input Power	0.5W/1W
Lowest Resonant Frequency, F ₀	650Hz ± 20%
Sensitivity @ 0.25W/0.5m	85 ± 3 dB
Effective Frequency Range	F ₀ to 4.0 KHz
Total Harmonic Distortion	< 5%

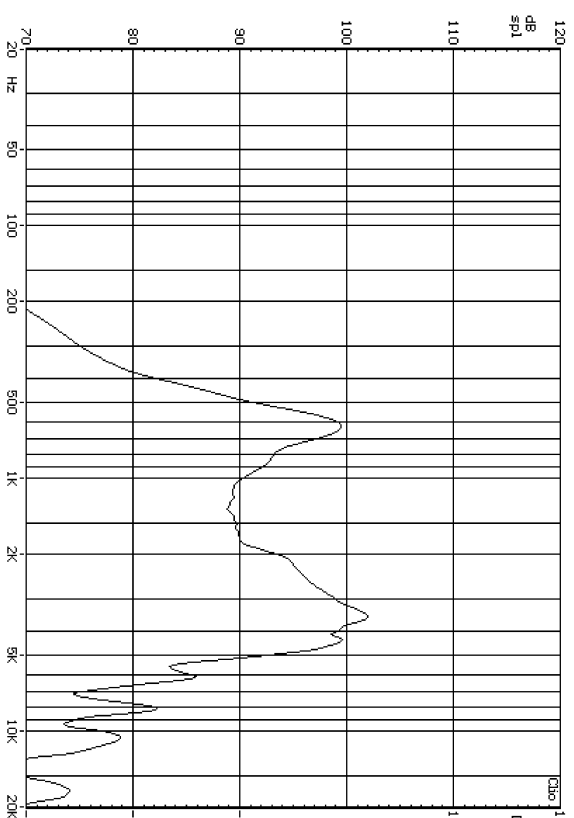

Part No. D0050008NMX14AR

50 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

