


Parameter	Specification
Dimensions	50x 20.5mm
Impedance	$8\Omega \pm 15\%$
Input Power	1.5W/2.0W
Lowest Resonant Frequency, $F_0$	190Hz $\pm 20\%$
Sensitivity @ 1W/0.5m	$86 \pm 3$ dB
Effective Frequency Range	$F_0$ to 10.0 KHz
Total Harmonic Distortion	< 5%

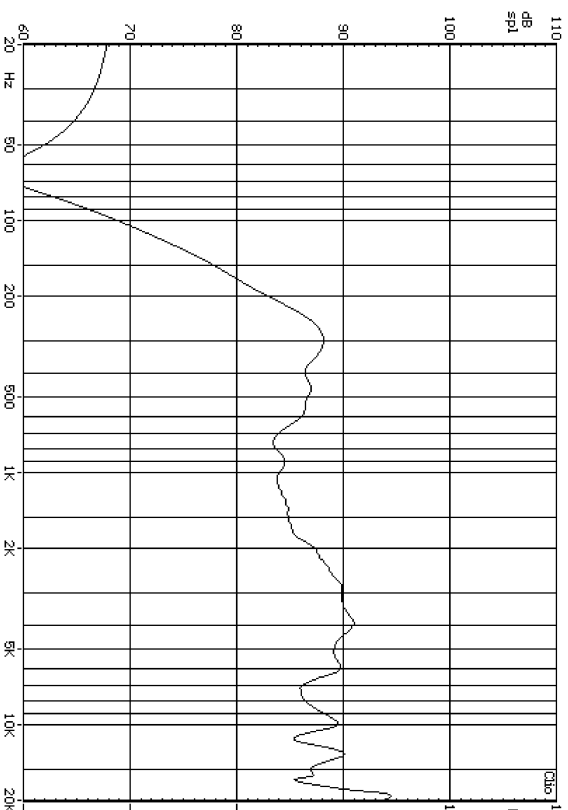

Part No. D0050008NU026AR

50 mm Speaker

Email: [speakers@stetron.com](mailto:speakers@stetron.com)

Web Site: [www.stetron.com](http://www.stetron.com)

