


Parameter	Specification
Dimensions	50x 18.5mm
Impedance	50Ω ± 15%
Input Power	0.5W/1W
Lowest Resonant Frequency, F ₀	300Hz ± 20%
Sensitivity @1W/0.5m	86 ± 3 dB
Effective Frequency Range	F ₀ to 5.0 kHz
Total Harmonic Distortion	< 5%

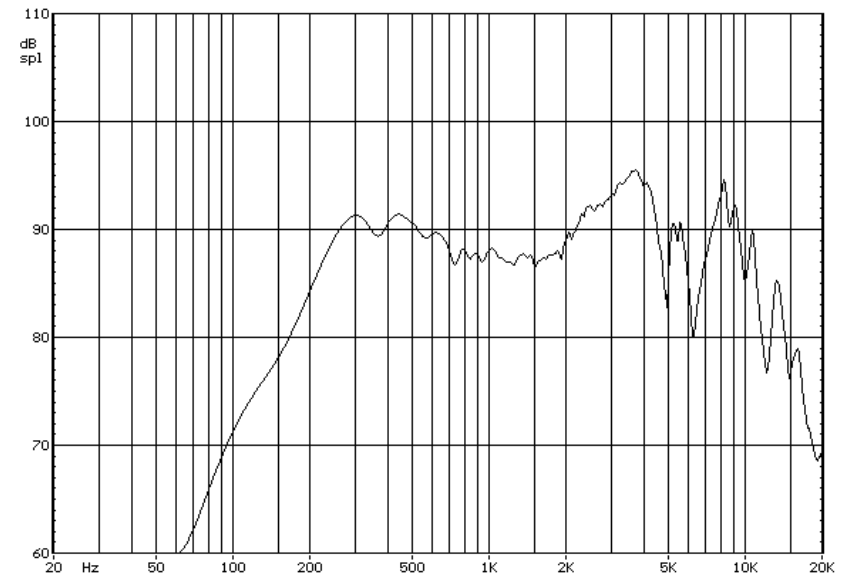

Specifications subject to change

Part No. P0050050FMC07AR rev 2.1

50 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

