


Typical Frequency Response



ITEM		SPECIFICATION	REMARKS
1	Dimensions	30.0 x 14.9 x 5.6mm	Length x Width x Height
2	Impedance	4.0Ω±15%	@ 2.0kHz/1V
3	Input Power	1W/1.5W	RMS/Peak
4	Lowest Resonant Frequency, F ₀	720Hz ±20%	Constant Voltage (1V RMS)
5	Output SPL	98dB ±3dB 84dB±3dB (1.0W/0.5m, for reference only)	Measured 1.0W/0.1m @ (0.8/0.1.0/1.2/1.5kHz) Avg. Using IEC 268-5 Baffle.
6	Total Harmonic Distortion	Max. 15% Max. 10% (for reference only)	@1W/0.1m/ 720Hz to 6kHz (0.1W/0.1m/720Hz to 6kHz)
7	Effective Frequency Range	F ₀ to 20kHz	See typical frequency response
8	Magnet Dimension	Φ7.7 x 1.8 mm	OD x H
TESTS			
9	Operation Test	White noise of 1W is applied for 96h.	The speaker must meet items 4 to 6 after test
10	Max. Input Power	The speaker shall be exposed to white noise of 1.5W for 1min.	
11	Buzz Test	2.0 Vrms applied from Fo to 20kHz	There shall be no extraneous noise
12	Polarity	A positive DC current is applied to the terminal marked +	The diaphragm shall move forward
13	Drop Test (in box)	Speakers properly packaged in their shipping carton are dropped on each side of the carton except the top from a height of 80cm (carton GW≤10kg) or 60cm (10kg<carton GW≤25kg)	There shall be no buzz/rattle and the part shall exhibit no physical damage (rivets, weld and glue must hold, no scratches or burrs on surfaces and no peeling of paint/coating)
14	Low Temperature Exposure	The speaker shall be exposed to -20 ±2°C, 50%RH for 96h with a 1h rest at room temperature.	The speaker must meet items 4 to 6 after test
15	High Temperature Exposure	The speaker shall be exposed to 70 ±3°C, 50%RH for 96h with a 1h rest at room temperature.	
16	Humidity Exposure	The speaker shall be exposed to 40±3°C, 90%RH for 96h with a 1h rest at room temperature.	

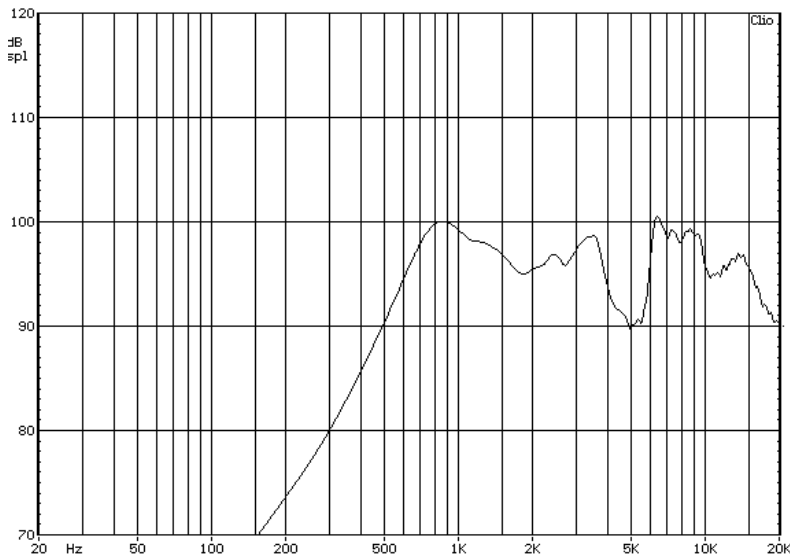

Stetron International Inc.

LoudSpeaker Specification
30x14.9x5.6mm, 4.0Ω, Cloth cone, 1W, RoHS

SIZE	DRAWN BY	PART No.	
A		P3014004NC013AR	
SCALE	DATE	SHEET	
N/A	30-June-09	1	
REV	DWG No. / FILE		
0.1	DB09-011		