


Parameter	Specification
Dimensions	13x 4.5mm
Impedance	$8\Omega \pm 15\%$
Input Power	0.5W/1W
Lowest Resonant Frequency, F_0	1250Hz $\pm 20\%$
Sensitivity @ 0.5W/0.3m	81 ± 3 dB
Effective Frequency Range	F_0 to 15.0 kHz
Total Harmonic Distortion	< 5%

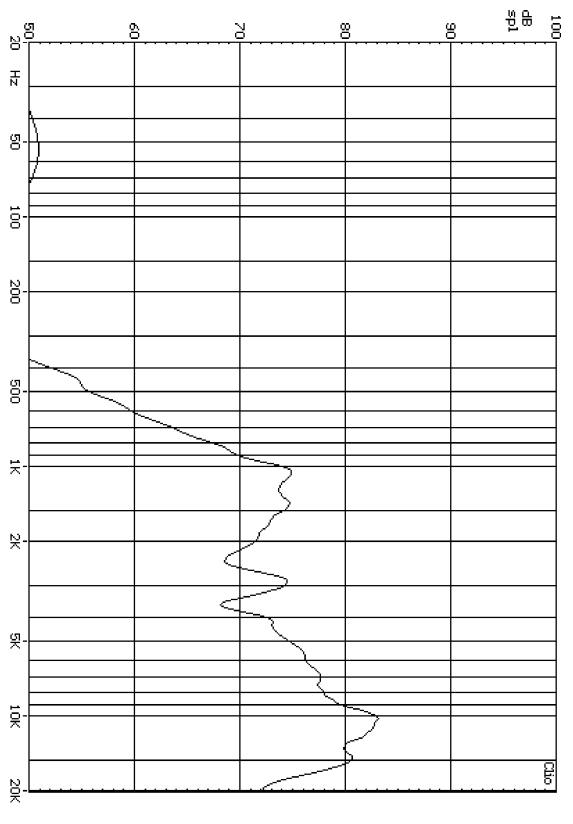

Part No. U0013008NM001AR

13 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

