


Parameter	Specification
Dimensions	16x 4mm
Impedance	8Ω ± 15%
Input Power	0.25W/0.5W
Lowest Resonant Frequency, F ₀	550Hz ± 20%
Sensitivity @ 0.25W/0.5m	75 ± 3 dB
Effective Frequency Range	F ₀ to 15.0 KHz
Total Harmonic Distortion	Max 2%

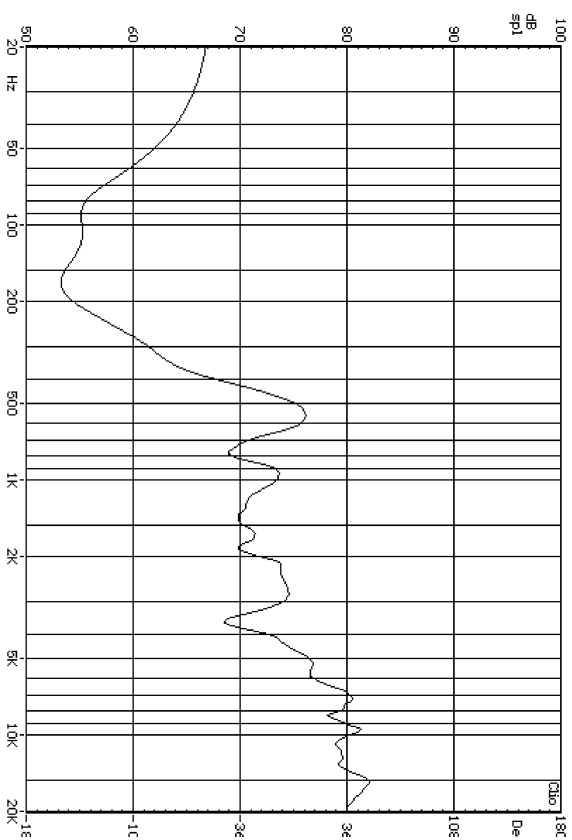

Part No. U0016008NM016AR

16 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

