



Parameter	Specification
Dimensions	16 x 4mm
Impedance	16Ω ± 15%
Input Power	0.5W/0.8W
Lowest Resonant Frequency, F ₀	900Hz ± 20%
Sensitivity @ 0.5W/0.5m	81 ± 3 dB
Effective Frequency Range	F ₀ to 15.0 kHz
Total Harmonic Distortion	< 15%

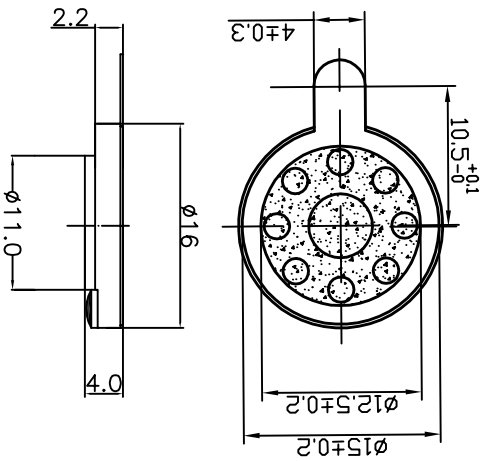

Part No. U0016016NM37BAR

16 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

