


Parameter	Specification
Dimensions	23x 4mm
Impedance	$16\Omega \pm 20\%$
Input Power	0.5W/0.8W
Lowest Resonant Frequency, F_0	$600\text{Hz} \pm 20\%$
Sensitivity @ 0.3W/0.5m	$80 \pm 3 \text{ dB}$
Effective Frequency Range	F_0 to 15.0 kHz
Total Harmonic Distortion	< 5%

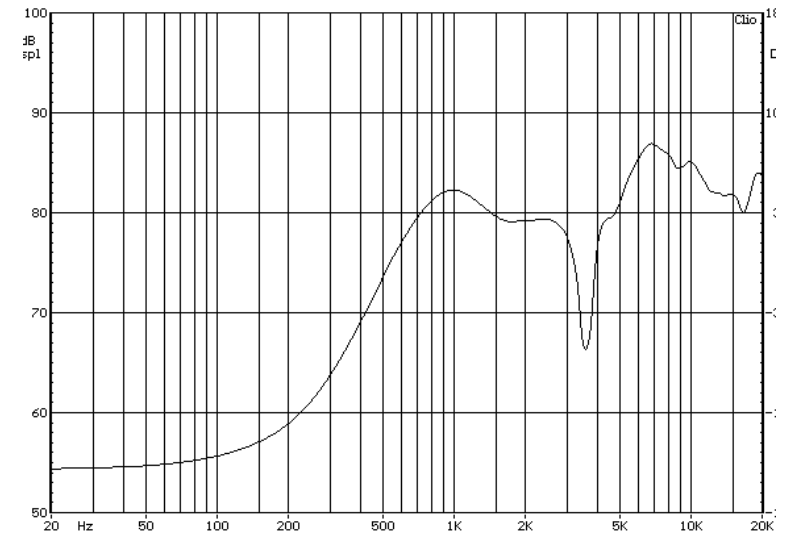

Specifications subject to change

Part No. U0023016NM004AR rev0.0

23 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

