


Parameter	Specification
Dimensions	23x 4mm
Impedance	16Ω ± 20%
Input Power	0.5W/0.8W
Lowest Resonant Frequency, F ₀	850Hz ± 20%
Sensitivity @ 0.5W/0.5m	85 ± 3 dB
Effective Frequency Range	F ₀ to 15.0 kHz
Total Harmonic Distortion	< 5%

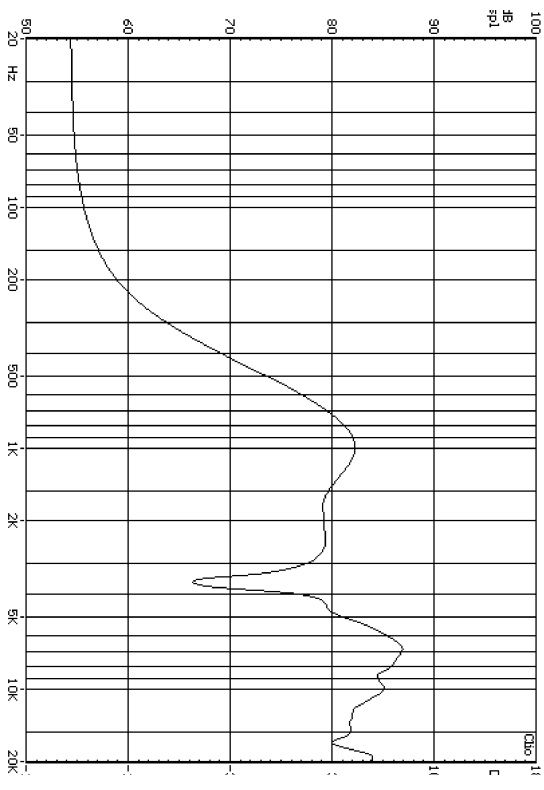

Part No. U0023016NM05AAR

23 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

