


Parameter	Specification
Dimensions	28x 5mm
Impedance	$16\Omega \pm 15\%$
Input Power	0.2W/0.4W
Lowest Resonant Frequency, $F_0$	$450\text{Hz} \pm 20\%$
Sensitivity @ 0.25W/0.5m	$79 \pm 3$ dB
Effective Frequency Range	$F_0$ to 6.0 kHz
Total Harmonic Distortion	< 5%

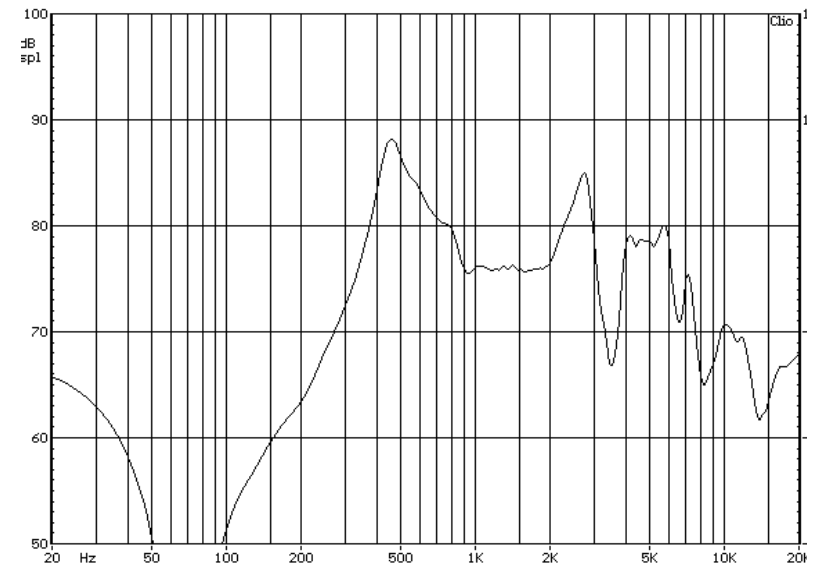

Specifications subject to change

Part No. U0028016NM12BBR rev0.0

28 mm Speaker

Email: [speakers@stetron.com](mailto:speakers@stetron.com)

Web Site: [www.stetron.com](http://www.stetron.com)

