
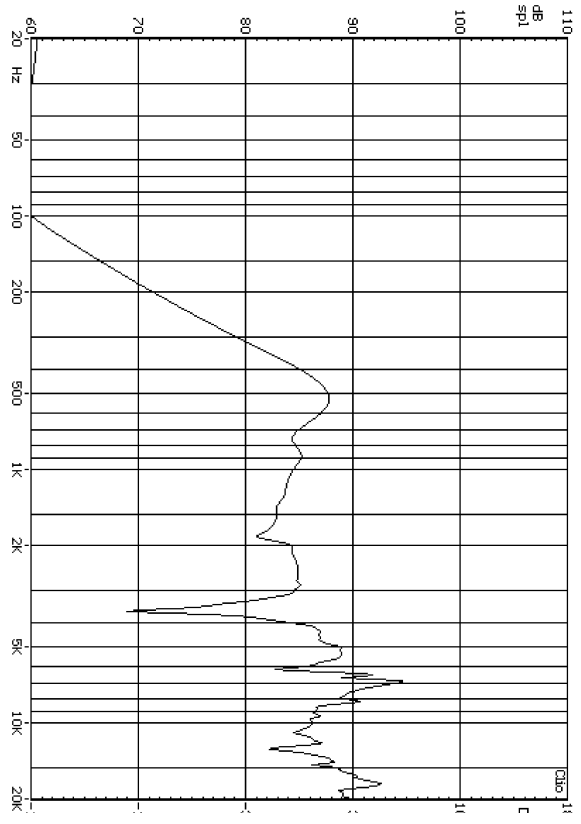


Parameter	Specification
Dimensions	40x 7mm
Impedance	8Ω ± 15%
Input Power	0.8W/1.2W
Lowest Resonant Frequency, F ₀	400Hz ± 20%
Sensitivity @ 0.25W/0.5m	83 ± 3 dB
Effective Frequency Range	F ₀ to 7.0 KHz
Total Harmonic Distortion	< 5%

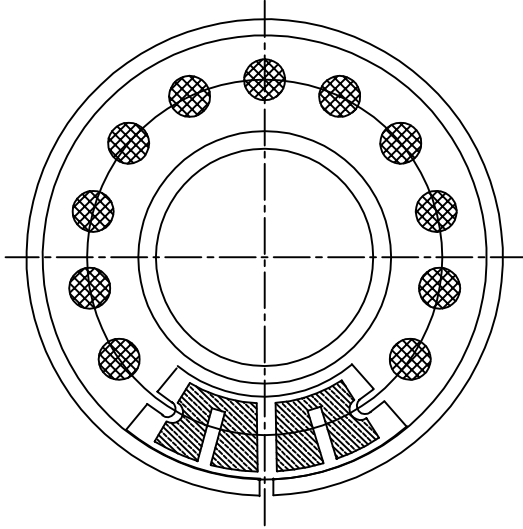

Part No. U0040008NM012BR

40 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

