


Parameter	Specification
Dimensions	70x 40mm
Impedance	8Ω ± 15%
Input Power	3.0W/5.0W
Lowest Resonant Frequency, F ₀	270Hz ± 20%
Sensitivity @ 1.0W/0.5m	89 ± 3 dB
Effective Frequency Range	F ₀ to 20.0 kHz
Total Harmonic Distortion	< 5%

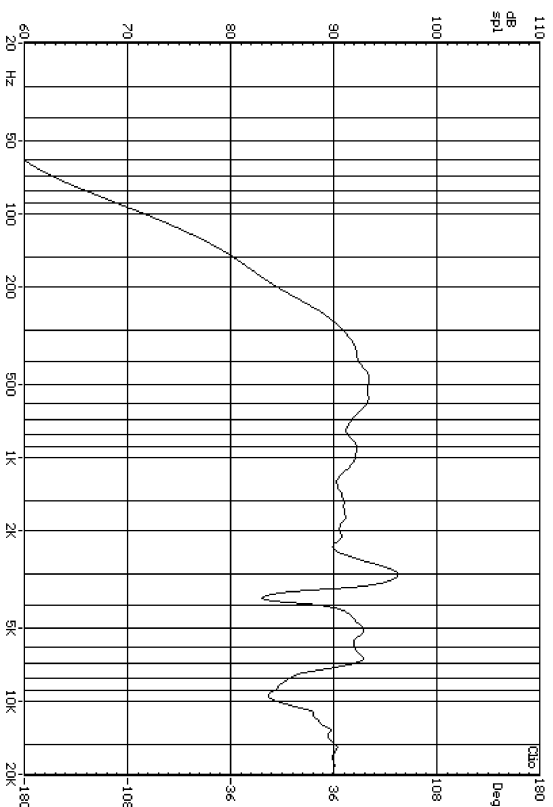

Part No. V4070008FC06AR

40x70 mm Speaker

Email: speakers@stetron.com

Web Site: www.stetron.com

