


Parameter	Specification
Size	40mm
Impedance	$4\Omega \pm 15\%$
Input Power	2.0W/4.0W
Lowest Resonant Frequency, F_0	$140\text{Hz} \pm 25\%$
SPL	$77 \pm 3 \text{ dB (1W/1m)}$
Effective Frequency Range	F_0 to 10.0 kHz
Total Harmonic Distortion, THD	Max 5% (200Hz - 500Hz @1W/1m) Max 3% (501Hz - 10 kHz @1W/1m)

Typical Frequency Response

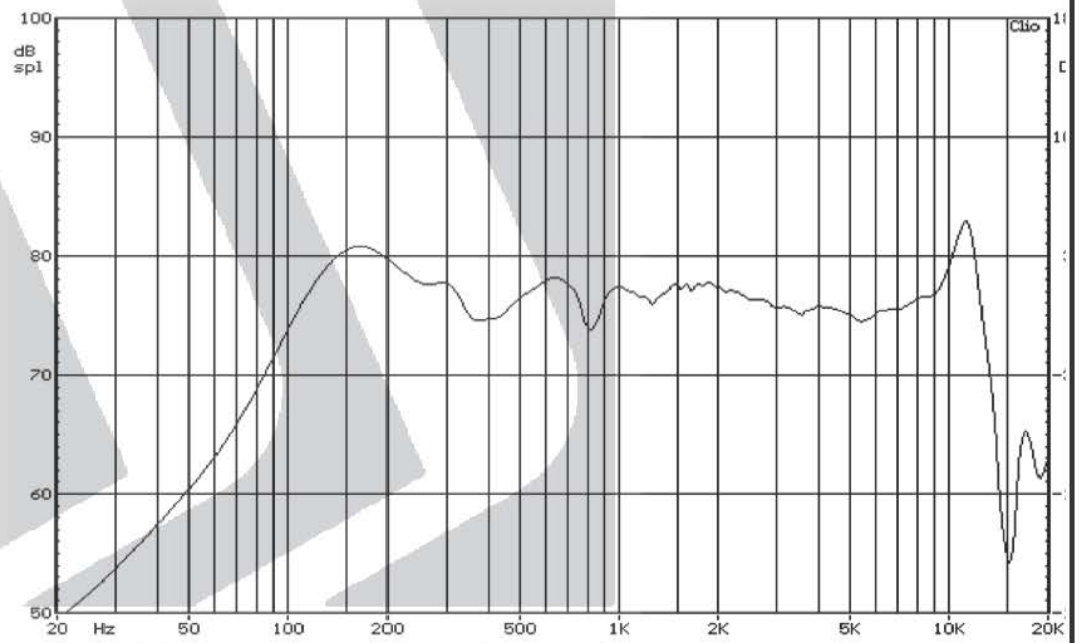

STETRON

*Specifications subject to change

Part No. D0040004FU23BAR

Speaker size:40mm

Web Site: www.stetron.com

