


Parameter	Specification
Size	40 x 30mm
Impedance	4Ω ± 15%
Input Power	2.0W/2.5W
Lowest Resonant Frequency, F ₀	450Hz ± 20%
SPL	102± 3 dB (2W/0.1m)
Effective Frequency Range	F ₀ to 10.0 kHz
Total Harmonic Distortion, THD	Max 10% (500 Hz - 2kHz @ 2W/0.1m) Max 15% (2 kHz - 6 kHz) 2W/0.1m

Typical Frequency Response

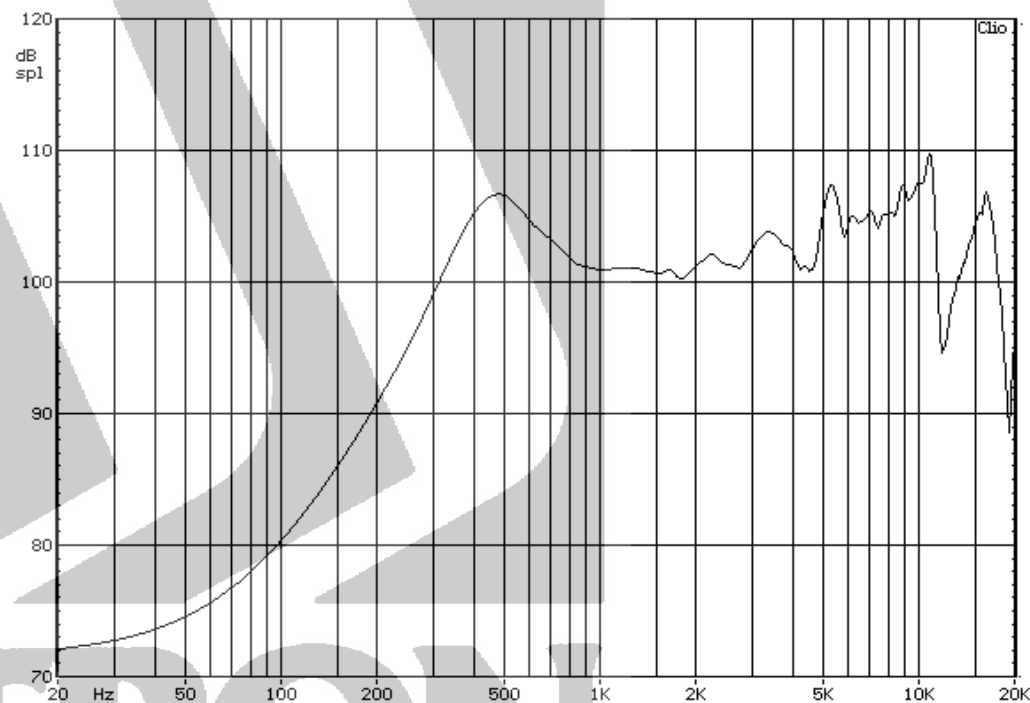

*Specifications subject to change

Part No. P4030004NC18AAR

Speaker size: 40 x 30mm

Web Site: www.stetron.com

