


Parameter	Specification
Size	50mm
Impedance	$8\Omega \pm 15\%$
Input Power	0.5W/1.0W
Lowest Resonant Frequency, F_0	$300\text{Hz} \pm 20\%$
SPL	$87 \pm 3 \text{ dB (1W/0.5m)}$
Effective Frequency Range	F_0 to 8.0 kHz
Total Harmonic Distortion, THD	Max 5% (500 Hz - 3 kHz @ 0.5W/0.5m)

Typical Frequency Response

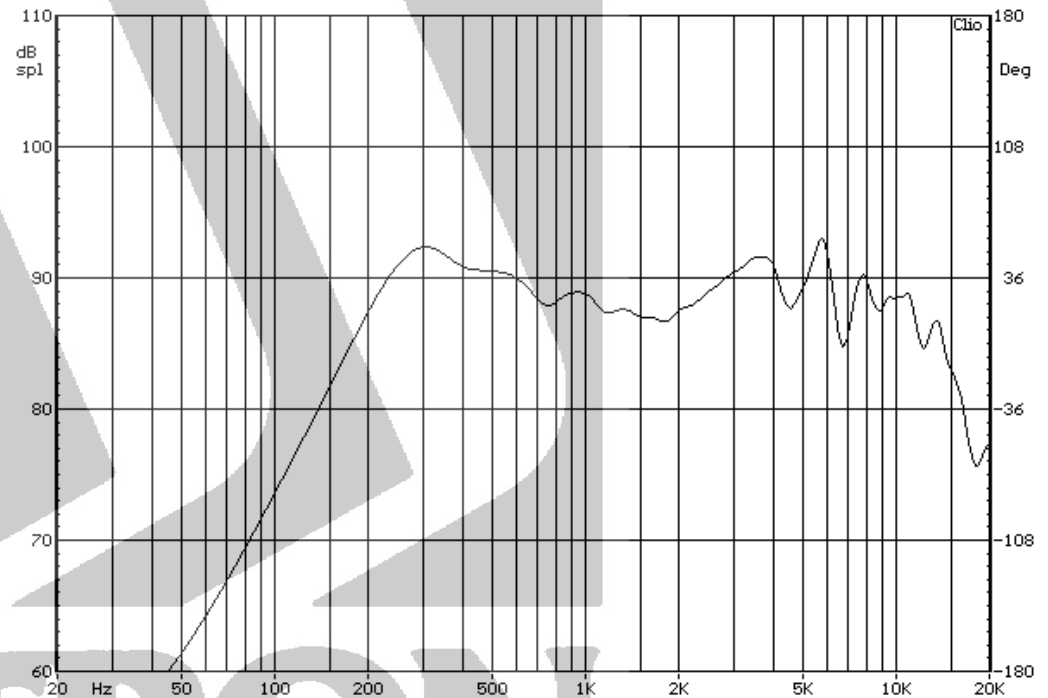

*Specifications subject to change

Part No. P0050008FM739AR

Speaker size: 50 mm

Web Site: www.stetron.com

