


Parameter	Specification
Size	40mm
Impedance	4Ω ± 15%
Input Power	4W/5W
Lowest Resonant Frequency, F ₀	130Hz ± 20%
SPL	81± 3 dB (1W/1m)
Effective Frequency Range	F ₀ to 20.0 kHz
Total Harmonic Distortion, THD	Max 6% (250 Hz - 10kHz @ 0.25W/0.5m)
Vas	0.074 L
Qts	0.43

Typical Frequency Response

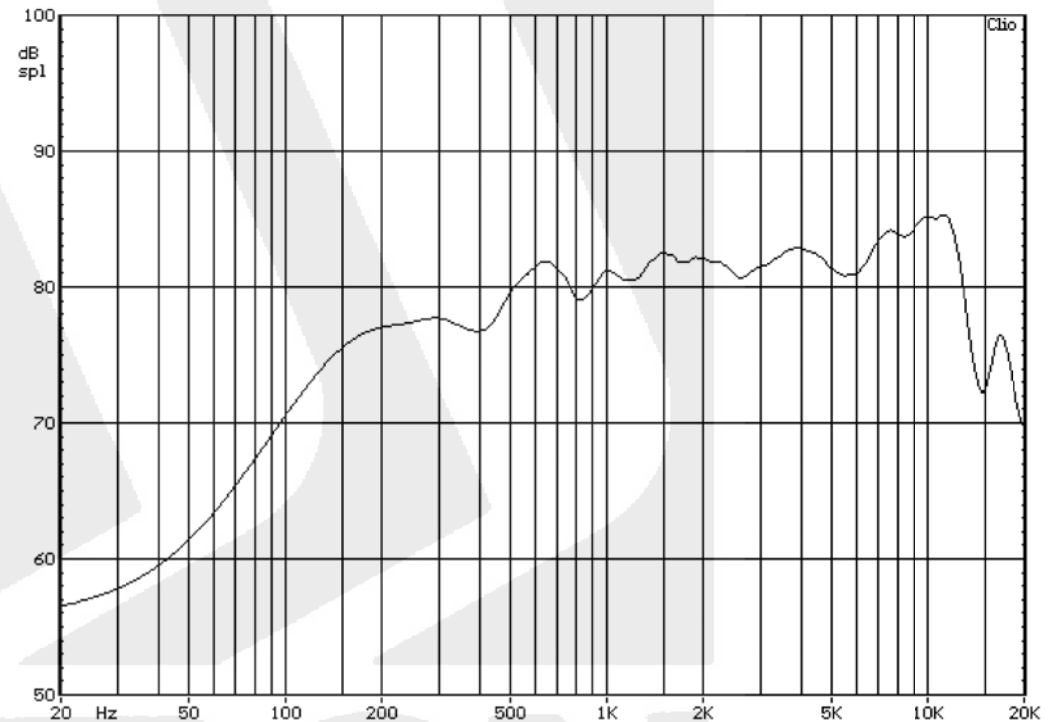

*Specifications subject to change

Part No. D0040004NRF6WER

Speaker size: 40mm

Web Site: www.stetron.com

