


Parameter	Specification
Size	28mm
Impedance	$16\Omega \pm 15\%$
Input Power	0.2W/0.3W
Lowest Resonant Frequency, F_0	$420\text{Hz} \pm 20\%$
SPL	$80 \pm 3 \text{ dB (0.25W/0.5m)}$
Effective Frequency Range	F_0 to 5.0 kHz

Typical Frequency Response

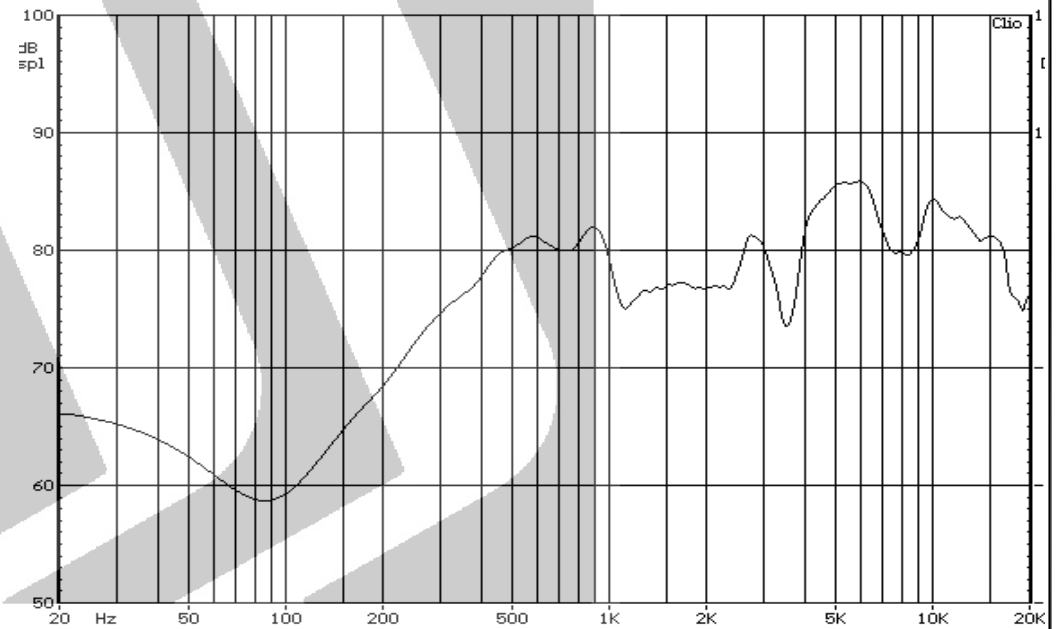

*Specifications subject to change

Part No. U0028016NM006AR

Speaker size: 28mm

Web Site: www.stetron.com

